válvulasCT
Pol. Ind. Can Torrella. Ronda Shimizu, 2. Nave 4
08233 VACARISSES (Barcelona) SPAIN
Tel. +34 93 828 04 44 · Fax +34 93 828 04 50
comercial@valvulasct.com www.valvulasct.com

ARTICULO: W2952
Esfera difusora para limpieza Línea Sanitaria Spray Ball for Cleaning. Sanitary line.


Características


1. Esfera difusora para limpieza interior de depósitos.
2. Extremo de conexión roscado DIN 2999.
3. Construcción en Inox AISI 316 L.
4. Pulido Sanitario Ra ≤ 0,8 µm.
5. Fácil limpieza y montaje.
6. Angulo de proyección 360º.
7. Doble rodamiento para giro de esfera.
8. Presión de trabajo máxima 3 Kg/cm2.
9. Temperatura máxima de trabajo 120 ºC.

Features

1. Spray Ball for interior cleaning of tanks.
2. Thread end according DIN 2999.
3. Made by AISI 316L.
4. Sanitary Polish.Ra ≤ 0,8 µm.
5. Easy cleaning and assembly.
6 .Projection Angle 360º.
7. Double Bearing.
8. Max. Working pressure 3 Kg/cm2.
9. Max. Working Temperature 120 ºC.



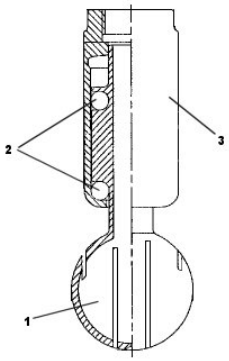

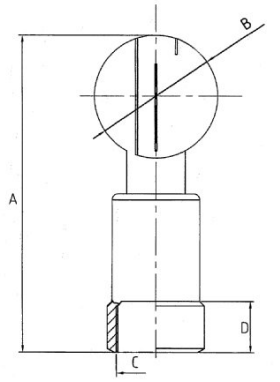

Nº	Denominación / Name	Material	Acabado Superficial/Surface Treatment
1	Esfera / Ball	Acero Inox AISI 316L / SS 316L	Pulido mecánico / Mechanical Polish
2	Rodamiento / Bearing	AISI 316 Endurecido / AISI 316 Hardened	------
3	Cuerpo / Body	Acero Inox AISI 316L / SS 316L	Pulido mecánico / Mechanical Polish

DIMENSIONES GENERALES / GENERAL DIMENSIONS

Ref.	Medida / Size	Dimensiones/Dimensions (mm)				Peso / Weight (Kg.)
		A	B	C	D	
2952 06	1”	146	52	1” BSP	22	0,400
2952 08	1 ½”	173	63	1 ½” BSP	27	0,750
2952 09	2”	202	75	2” BSP	34	1,100

válvulasCT
Pol. Ind. Can Torrella. Ronda Shimizu, 2. Nave 4
08233 VACARISSES (Barcelona) SPAIN
Tel. +34 93 828 04 44 · Fax +34 93 828 04 50
comercial@valvulasct.com www.valvulasct.com

RADIO DE LIMPIEZA / CLEANING RADIUS

Ref.	Medida / Size	Radio a 2 Bar / Radius at 2 Bar
2952 06	1”	1 – 1,2 mts.
2952 08	1 ½”	1,8 – 2 mts.
2952 09	2”	2 – 2,4 mts.

DIAGRAMA DE PERDIDAS DE CARGA / HEAD LOSSES DIAGRAM

