Three Pieces Ball Valves IMF 1000 WOG

Size ¼” – 4” (DN 10 -100) Stainless Steel



Fig. 140IMF
FULL BORE

Threaded according:
DIN 259/2999 (GAS)

CE
0035


ICP VALVES S.A.
E-Mail: sales@ icp-valves.com
Internet: www.icp-valves.com

Authorized Distributor

Data given can be changed without notice

Three Pieces Ball Valves IMF 1000 WOG

Parts and materials

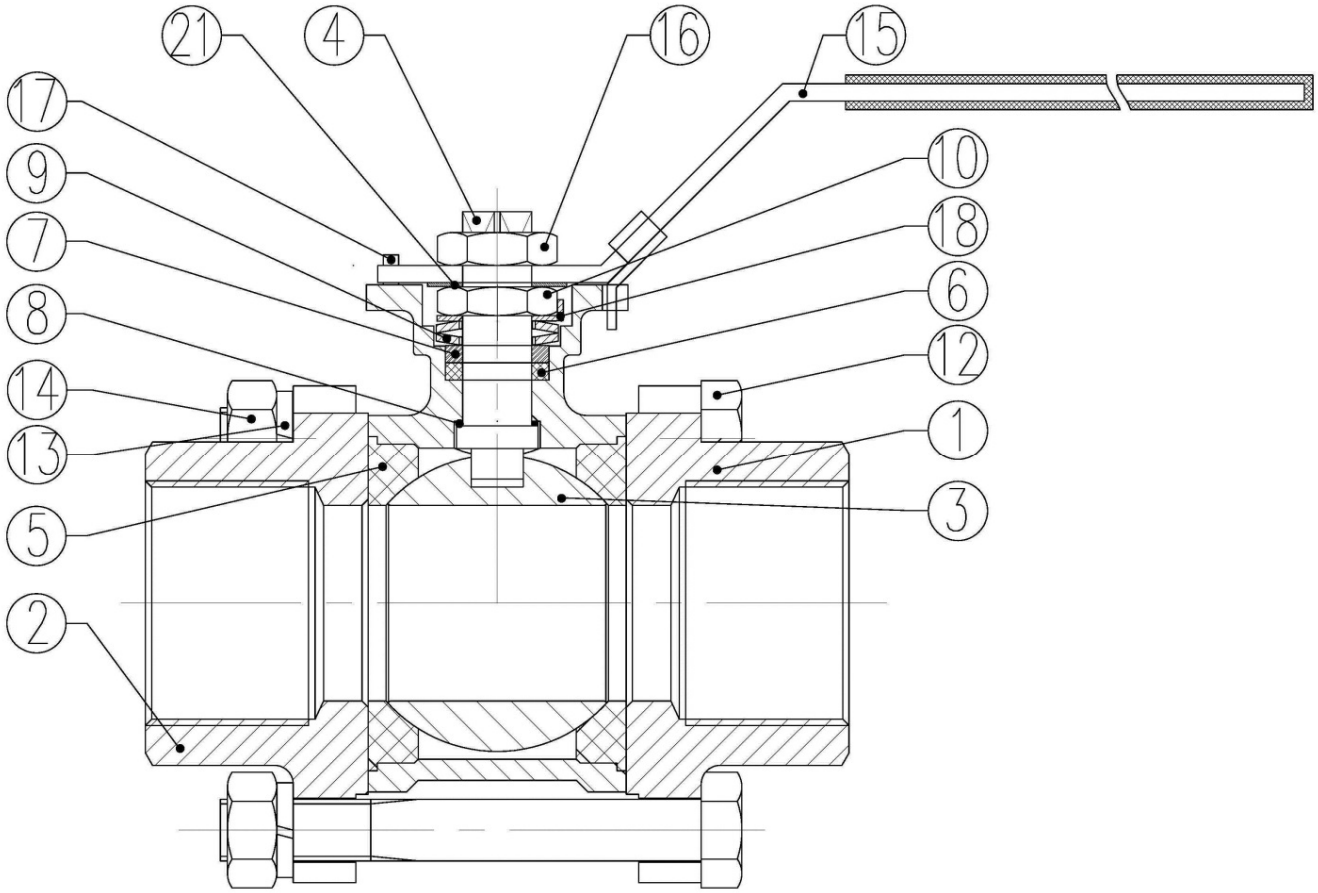

Item	Description	Material
1	Body	1.4408
2	Body connector	1.4408
3	Ball	1.4408
4	Stem	1.4401
5	Seat ring	PTFE
6	Stem packing	PTFE
7	Ring	AISI 304
8	Seat thrust seal	PTFE
9	Belleville w asher	AISI 304
10	Gland Nut	AISI 304
12	Bolt	1.4301
13	Washer	AISI 304
14	Nut	1.4301
15	Handle	AISI 304+PVC
16	Handle nut	AISI 304
17	Stop pin	AISI 304
18	Locking w asher	AISI 304
21	Washer	AISI 304


ICP VALVES S.A.
E-Mail: sales@ icp-valves.com
Internet: www.icp-valves.com

Authorized Distributor

Data given can be changed without notice

Three Pieces Ball Valves IMF 1000 WOG

Dimensions

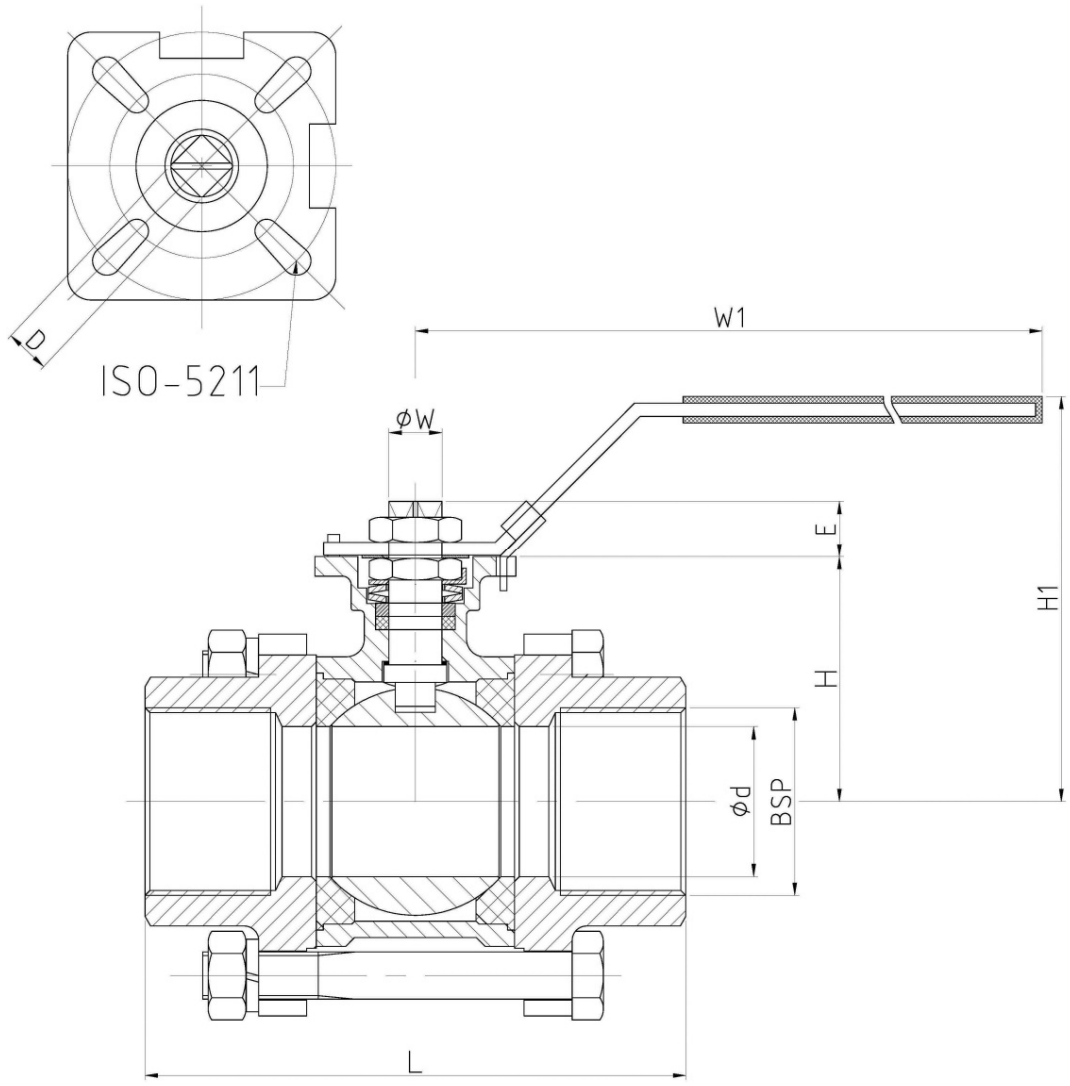

Dimensions

SIZE	N.P.S	Ød	L	W1	H	H1	E	D	ØW	ISO5211	WEIGHT
¼" (DN 10)	¼"	11,6	55	143	38	65	9	9	12	F04/03	0,58
⅜" (DN 12)	⅜"	12,5	60	143	38	65	9	9	12	F04/03	0,58
½" (DN 15)	½"	15	75	143	38	65	9	9	12	F04/03	0,57
¾" (DN 20)	¾"	20	80	143	47	76	9	9	12	F04/03	0,76
1" (DN 25)	1"	25	90	168	60	95	11	11	14	F05/04	1,03
1¼" (DN 32)	1¼"	32	110	168	62,7	95	11	11	14	F05/04	1,59
1½" (DN 40)	1½"	38	120	190	79	115	15	14	18	F07/05	2,3
2" (DN 50)	2"	50	140	190	88	124	15	14	18	F07/05	3,25
2½" (DN 65)	2½"	64	162	350	109,1	140	17	17	22	F10/07	6,9
3" (DN 80)	3"	76	184	350	116,2	150	17	17	22	F10/07	11
4" (DN 100)	4"	94	228	350	142	175	22	22	28	F12/07	19,2

(*) Dimensions in mm and weight in kg.

Note:

Dimensions not subject to International Standards can vary in ±10%. ICP reserves the right to change those dimensions without notice, due to they do not affect integrity and performance of the valves.

ICP VALVES S.A.
E-Mail: sales@ icp-valves.com
Internet: www.icp-valves.com

Authorized Distributor

Data given can be changed without notice

Three Pieces Ball Valves IMF 1000 WOG

Torque, Kv, P&T Rating, Actreg Actuator

Torque Values in Nm

VALVE SIZE	AT DIFFERENTIAL PRESSURE 63 bar	VALVE SIZE	AT DIFFERENTIAL PRESSURE 25 bar
¼" (DN 10)	4,9	2½" (DN 65)	58,3
⅜" (DN 12)	4,9	3" (DN 80)	86,8
½" (DN 15)	4,9	4" (DN 100)	122,6
¾" (DN 20)	6,5		
1" (DN 25)	13,7		
1¼" (DN 32)	21,6		
1½" (DN 40)	29,5		
2" (DN 50)	47		

Kv Values in m^3/h

VALVE SIZE	Kv	VALVE SIZE	Kv
¼" (DN 10)	6,6	1½" (DN 40)	80,0
⅜" (DN 12)	6,6	2" (DN 50)	150,0
½" (DN 15)	11,2	2½" (DN 65)	265,0
¾" (DN 20)	21,0	3" (DN 80)	415,0
1" (DN 25)	34,0	4" (DN 100)	780,0
1¼" (DN 32)	57,0		

Pressure-Temperature

